



Suggested Application Instructions

Please Note:

The instructions below are for a dry application, but this product can also be wet-applied onto most surfaces (useful for larger graphics). If you are wet-applying your design, make sure the surface is very wet before application and be sure to use a squeegee to push out all of the water once your design is in place.


Step 1

Before applying any vinyl to a surface, always ensure that the surface has been cleaned. We recommend using just water, but if you use a cleaning solution please ensure it has completely dried or evaporated before continuing.

Step 2

Turn the graphic over and place it face down on a clean surface. For static cling window stickers, place the graphic down with the cloudy backing material face up.

For larger graphics, peel back the top 20-30% of the backing material and gently fold it back over itself. For smaller graphics, simply peel off the entire backing paper.

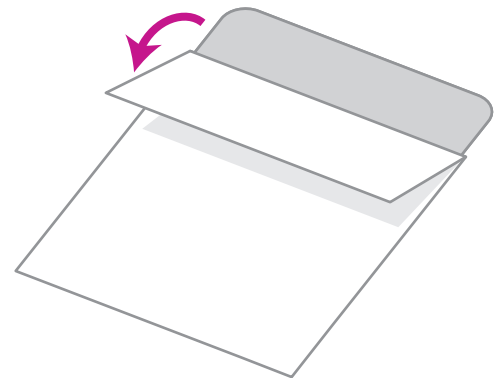


Step 3

Pick up the graphic with the “sticky” side facing away from you. With the adhesive exposed on the top 20-30% of the graphic, gently stick the top edge on to the surface in your desired location. Smooth down the top section using our recommended squeegee (or a credit card wrapped in a paper towel) starting from the centre and working outwards.

Step 4

With the top section securely in place, reach behind the graphic to find the folded backing material and slowly begin to pull it down. As you pull down on the backing material with one hand, use the squeegee in your other hand to smooth out and apply the graphic, again starting from the centre and working outwards.

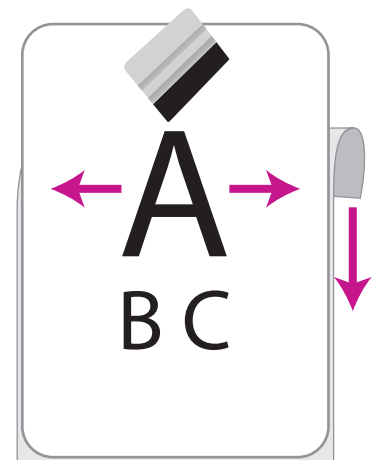

Step 5

Once all of the backing material has been removed and the graphic has been applied, check for any air bubbles beneath the vinyl. If any air is trapped, use the squeegee to push the air to the outside of the graphic.

Disclaimers

Please satisfy yourself that you are confident of how to apply your graphic on to your chosen surface before attempting application. Colour Frog cannot be held responsible for a poor or failed application. Do not attempt to apply the graphics in very cold or very hot temperatures. If your product comes with gridded application tape the gridlines are not to be used as a horizontal level when applying your graphic. Always look at the graphic itself when ensuring it will be level as the grid squares may not be horizontally aligned with the graphic itself.